

Automated Packaging System

PACjacket 3



The **PACjacket 3** system automatically seals your product in a lightweight, ultra-protective bubble mailer made from a durable, moisture resistant, multi-layer blend of co-extruded polyethylene film. **Quality, precision, and speed** were what we had in mind for our customers when we developed the PACjacket automated system. Our new single web design produces a high quality seal that offers greater security for its contents by reducing the number of heat seals necessary to produce a finished package. This is the ultimate automated system for high volume e-commerce applications. On average the PACjacket machine produces 15–20* bags per minute. *output may vary


7" colored high-resolution touch screen operator interface panel which allows for better graphics and more information per page.



Dual sensors interrupt the cycle and open the seal assembly if an obstruction is sensed.




Jaw pressure switch that senses resistance in the jaws during closing, ensuring the operator will not be harmed.



Automatic film feed assist.




Single web system with center folder eliminates the need for adjustment/alignment of two webs of material.




Auto Labeler with fully integrated mounting system with easy front access for roll change or service work.



Fiber optic eye senses the size of your product and will cut the package to the appropriate length.



Precise, servo-driven web feeding.



PAC
WORLDWIDE
Protecting The Things People Care About™



Visit us at www.pac.com or email: info@pac.com

Automated Packaging System


PACjacket 3



One longitudinal seal enhances security of the contents.



Self-centering guides keep rolls aligned and centered correctly while moving through the system.




End of Roll Sensor.




Requires only one roll vs. two.




No heavy lifting with the Pneumatic roll lift.



Save space with a smaller, more compact floor footprint.

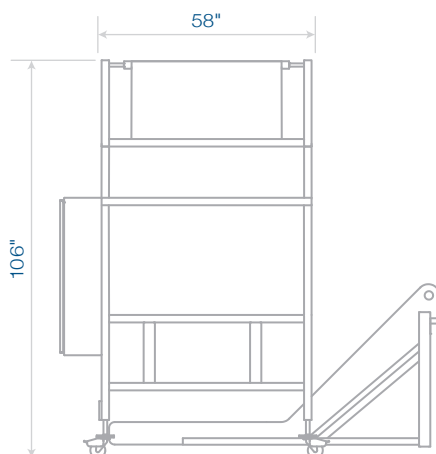

Front View (with conveyor)

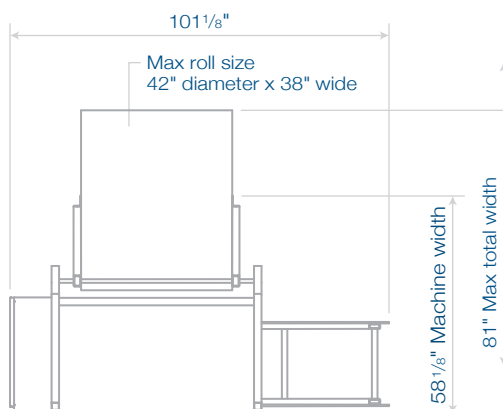

Top View

Specifications:

- Electrical: 208 - 220V, 40 AMP 50/60 Hz
- Air: 90 PSI (CLEAN, DRY), 3.5 CFM

Capable of running:

- Standard 7/64" bubble film



Watch Video

SEATTLE | CINCINNATI | PHOENIX | BETHLEHEM
MEXICO CITY | KUALA LUMPUR | LONDON